

OT FIT 60/220-240/12 P

CV Power supplies 12 V



Product family benefits

- Versatile scope of application due to output power range of up to 300 W
- Very high efficiency
- IP rating: up to IP67
- High surge protection: up to 6 kV (L-N) / 6 kV (L/N-PE)

Areas of application

- Suitable for indoor and outdoor installations
- Ideal for mounting in very tight spaces

Product datasheet

Technical data

Electrical data

Nominal output power	60 W
Mains frequency	50...60 Hz
Nominal voltage	220...240 V
Nominal current	0.36 A
Device power loss	8.6 W
Power factor λ	0.95 ¹⁾
ECG efficiency	87 % ²⁾
Inrush current	45 A ³⁾
Nominal output voltage	12.5 V
Input voltage AC	198...264 V
Output ripple Voltage (100 Hz)	< 3 % ⁴⁾


¹⁾ Typical, Full load, 230 VAC, 50 Hz / 60 Hz

²⁾ At full load and 230 V / At 50 Hz

³⁾ At Full Load, 240VAC, Cold StartDuration=250uS 50% Ipk-50% Ipk

⁴⁾ ripple @ 100 Hz / full load

Dimensions & weight

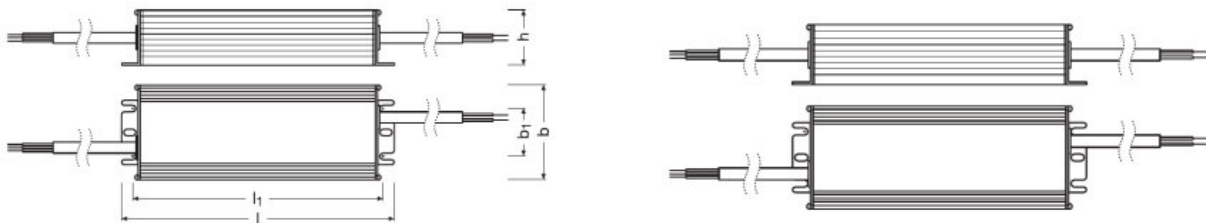

Length	157.0 mm
Width	53.0 mm
Height	31.5 mm
Mounting hole spacing, length	153 mm
Mounting hole spacing, width	27.0 mm
Product weight	473.00 g

Temperatures & operating conditions

Ambient temperature range	-40...+50 °C ¹⁾
Permitted rel. humidity during operation	5...85 % ²⁾

Product datasheet

1) At fullload, Tc not exceeded

2) Non-condensing

Capabilities

Suitable for fixtures with prot. class	I / II
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Dimmable	No
Number of channels	1




Certificates & standards

Type of protection	IP66/IP67
Standards	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 61000-3-3/Acc. to EN 60598-1/Acc. to EN 62384
Approval marks – approval	CE / CCC / ENEC / TISI / RCM

Logistical data

Commodity code	850440829000
----------------	--------------

Download Data

File
 User instruction OPTOTRONIC LED Power Supply
 User instruction OPTOTRONIC LED Power Supply
 Declarations of conformity OT FIT 12P CE 4192443 02 130220

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172133487	OT FIT 60/220-240/12 P	Shipping carton box 15	349 mm x 224 mm x 153 mm	11.96 dm ³	7430.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.